

LINKaLIGHT™

by Western Technology™

Designed + Manufactured + Serviced in the USA

ORDINARY LOCATION LIGHTING

KICK-IT TOUGH
• LED SAFETY LIGHTS •

Model 4400 - Industrial LED String Light System

August 2024






ORDINARY
LOCATION
LIGHTING



Product Features

Light Output:	Variable Intensity Control (Dimmer): with a continuous range in Luminous Flux: 600 to + 8,300 lumens
Brightness:	High: ~4,000 Lux Low: ~400 Lux @ 1ft.
Reflective Optic Angle:	~75° (Floodlight Projection)
Observed Beam Angle:	~100° (Floodlight Projection)
Light Source:	COB LED
Color Temperature:	~5700K, 70CRI
Power Input:	120-277 VAC, 50/60 Hz
Material/Construction:	Light Body: 6061-T6 Aluminum, Bumpers: Polyurethane
Dimensions:	8.0" Length X 4.25" Width X 4.25" Depth
Weight:	Lighthead: ~5.3 lbs
Special Features:	Able to Plug end-to-end Daisy-chain lights together up to 250ft. Thermally regulated for safe handling Variety of mounting options available.
Accessories:	#4400 Blast Shield (single) #4400 Bspak - 12 (Box of 12 blast shields) #4400 SCAFF MT - Scaffolding Mount #4400 LINKaLIGHT Dome Diffuser

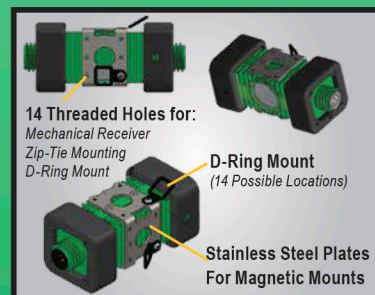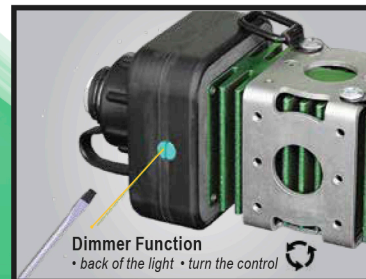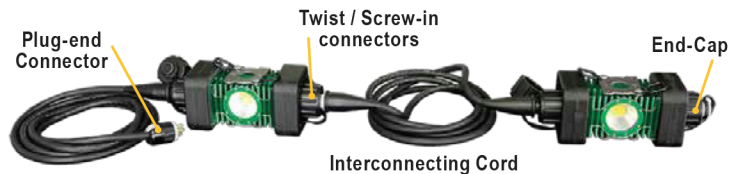

*Equipment specifications, options & availability subject to change.



WTT Western Technology
LIGHTS CERTIFIED, TRUST EARNED